


Product Specification


Model: ND43PNC

Product Feature

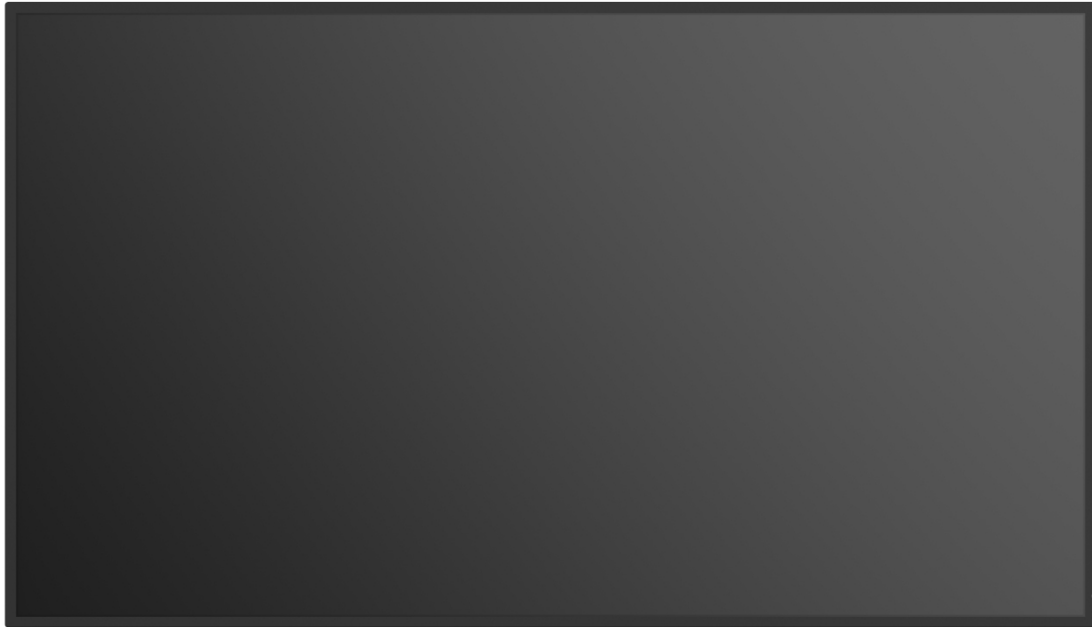

- ✧ Bottom 2 USB 2.0 ports
- ✧ Side physical key
- ✧ Side loudspeaker
- ✧ 4K UI
- ✧ Compatible with installing the NUC module
- ✧ Hidden remote reception
- ✧ Even Bezel
- ✧ Support Landscape&Portrait Mode
- ✧ Anti-Glare Panel

Dimension

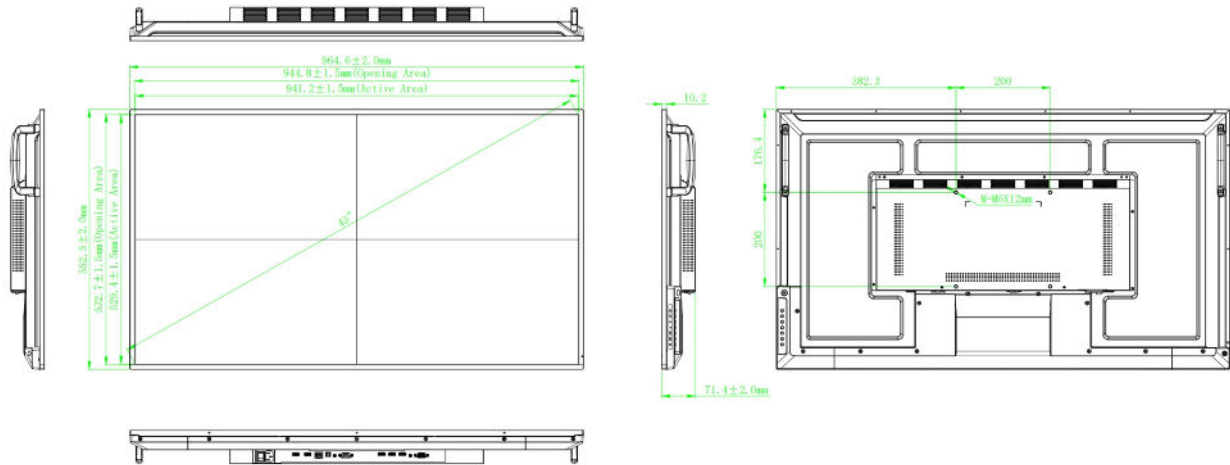

Display

Size	43inch
Panel Type	VA
Response Time	6.5ms
Aspect Ratio	16:9
Display Area	941.184(H) \times 529.416(V)mm
Pixel Pitch	0.2451 \times 0.2451mm
Resolution	3840(H) \times 2160(V)
Refreshing Frequency	60Hz
Display Color	1.07B(10bit)
NTSC	72%
Operation Hour	16/7
Contrast Ratio	5000:1
Viewing Angle	178 $^{\circ}$ (H/V)
Back Light Unit	DLED
Brightness with glass(min)	400cd/m ²
Brightness with glass(typ)	450cd/m ²
Life Time	\geq 30000 Hours

Operating System

System Version	Android 8.0
RAM	3G
ROM	16G
CPU	A73×2+A53×2
GPU	Mali-G51MP2

Audio

Sound Channel	2.0
Output Power	2×8W

Power

Power Requirements	100-240V~50/60Hz 1.5A
Overall Power(Max.)	150W
Standby Power	≤0.5W

I/O Port

HDMI IN	2
HDMI OUT (optional)	1
USB 2.0	2
VGA IN	1
AUDIO IN	1
AUDIO OUT	1
SPDIF	1
RS232	1
RJ45 IN	1

Physical Specifications

Dimension L×H×D	964.6×552.5×71.4mm
Dimension (package) L×W×H	1056×156×672mm
Thickness of machine and wall mount	95.4mm(WIB4722A)
Thickness of bezel	9.9mm
Wall-hanging Screw Spec	M6×12mm
VESA	200×200mm

Net Weight	9.35Kg
Gross Weight	12.20Kg

Accessories

Power Cord	×1
Power Adapter	×1
Remote Control	×1
WiFi Module	×1
Wall Mount	×1

Environmental Conditions

Operation Temperature	0°C ~ 40°C
Operation Humidity	10% ~ 90%RH
Storage Temperature	-20°C ~ 60°C
Storage Humidity	10% ~ 90%RH
Altitude	Below 5000 meters

Optional Module

Wireless Module	USB WIFI Dongle: 8822BU
-----------------	-------------------------

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product.

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.

Should the above-mentioned change in the document become necessary, the document may be updated without written notice.