




The MAXHUB UC S05 Unified Communication Bar

## UNLEASH THE POWER OF COLLABORATION WITH THE MAXHUB UC S05

A simple all-in-one unified communication solution. Quickly deploy video conferencing solution without compromising on professional audio and visual experience.

### Collaborate Effortlessly

Auto-framing, zoom in/out, camera position preset to be controlled by the remote controller.




USB



### A Visionary Camera

Auto-framing | 3 Camera position presets | 120° Viewing angle | 12MP | 5X digital zoom

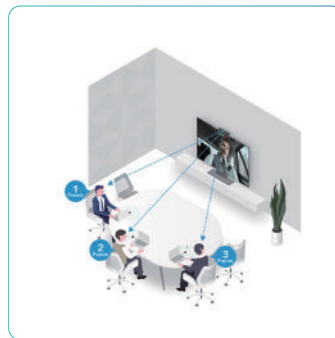

### FOCUSES ON THE PRESENTER

Auto-framing with intelligent face detection and voice localization tracks whoever is speaking and smoothly switches between presenters.

### 3 CAMERA POSITION PRESETS

Enable instant meeting start up, free from repeated camera setting

### 120° FOV


Full room coverage




Adaptive echo canceller



Automatic tracking




Noise reduction



Automatic gain control



Dereverberation

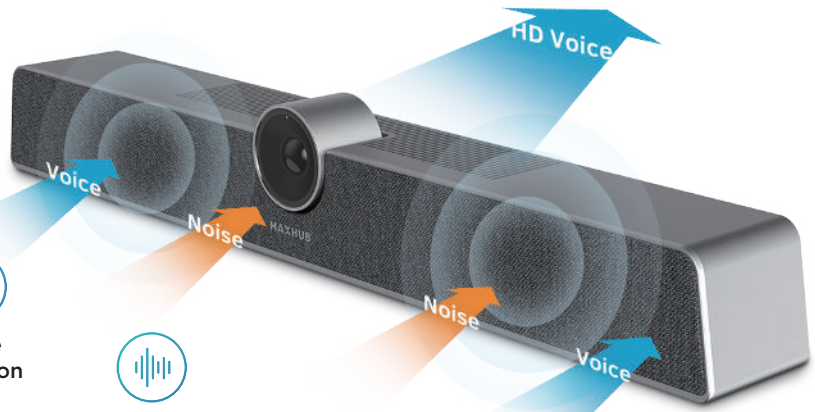

## Studio-quality Sound

6-element Microphone | 8W Speakerphone

## Try More Ways

- Various ports that come in handy.
- Mount on a wall, on top of a display, or on desktop.

AUX IN/OUT | USB Type-C | DC 2.0



AUX IN/OUT

USB Type-C

DC 2.0

## Specification

### Camera

Pixel	12M
Resolution and Frame Rate	H.264/MJPEG: (1)3840x2160 (2)2560x1440 (3)1920x1080 (4)1280x720 (5)1024x576 (6)960x540 (7)800x600 (8)640x480 (9)640x360 (10)480x270 (11)352x288 (12)320x240 YUY2: (1)640x480 (2)640x360 (3)480x270 (4)352x288 (5)320x240
Output Format	MJPEG/YUY2/H.264
Field of View	FOV 120°(D)
Adjustable Angle	Up and down 15°by manual adjustment
Focus mode	Fixed focus
Focus distance	2m

### Sound

Sound Channel	1.0
Output Power	1x8W

### Adapterization

Quantity	6
Voice Pickup Range	0~8m

### Power

Power Requirements	12V DC 3A
Overall Power(Max.)	36W
Standby Power	≤0.5W

### I/O Port

USB Type-C	1
AUX IN/OUT	1
DC 2.0	1

### Physical Specifications

Dimension LxHxD	462x76x93 mm
Dimension (package) LxWxH	538x160x169mm
Net Weight	1.03Kg
Gross Weight	1pcs 2.3Kg 4pcs 11.7Kg

### Accessories

USB Cable	x1
Remote Control	x1
Power Adapter	x1
Wall-mounted Components	x1
Peeping Cover	x1

### Environmental Conditions

Operation Temperature	0°C - 40°C
Operation Humidity	10% - 90%RH
Storage Temperature	-20°C - 60°C
Storage Humidity	10% - 90%RH
Altitude	Below 5000 meters