

Product Highlights

Complete Internet Solution

A total solution that helps you connect, share, and enjoy your Internet connection with a single device that's easy to set up and manage

Wireless AC and Gigabit Ethernet

Stream HD multimedia across your home without interruption using the fastest wired and wireless technologies available today

Simple Setup

Set up the DSL-245GE in no time with the web-based setup wizard, and create wireless connections easily using Wi-Fi Protected Setup (WPS)



DSL-245GE

Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router

Features

Connectivity

- Supports multiple WAN connections for flexibility, redundancy, and future connectivity
- Built-in ADSL2+/VDSL2 modem for connecting to your high-speed broadband Internet connection
- Gigabit WAN port supports high-speed Internet connections of today and tomorrow
- Four Gigabit LAN ports to connect wired devices for high-speed online activities
- Frequency Range:
 - 2.4GHz: 2.412GHz – 2.472GHz
 - 5GHz: 5.150GHz – 5.250GHz
- Maximum Output Power (EIRP):
 - 2.4GHz: 18.7dBm
 - 5GHz: 22.74dBm
- SuperSpeed USB 3.0 port to share media from a storage device

Security

- Wi-Fi Protected Setup (WPS) to quickly add devices to your network
- WPA/WPA2 encryption

Ease of Use

- Quick Setup Wizard

The DSL-245GE Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router is a highly integrated router with everything your home or small business needs for high-speed Internet access. It combines an ADSL2+/VDSL2 modem, Gigabit Ethernet Internet Port, Voice over IP (VoIP), and Gigabit wireless together in a single, easy-to-use product that shares an Internet connection for all your devices.

Fast and Reliable Home Network

The D-Link DSL-245GE Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router creates a blazing fast home network that connects all of your devices to your broadband Internet connection. Concurrent dual-band 802.11ac brings you the future of high-bandwidth wireless connectivity, allowing you to stream HD video, make Internet voice calls, and surf the Internet from every corner of your home without interruption. Gigabit Ethernet ports provide high-speed wired connections for up to four PCs or other devices. It's stylish, easy to use, and provides you with a reliable network for today and tomorrow.

Multiple Failover Redundancy and Future Connectivity

The D-Link DSL-245GE Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router comes not only with a built-in high-speed VDSL/ADSL modem, capable of up to 100 Mbps VDSL/24 Mbps ADSL speeds, but is also equipped with a Gigabit Ethernet WAN port. This means that if your primary connection method should fail, the DSL-245GE will automatically fall back to your pre-defined backup connection.

Smooth Streaming with Wireless AC

The DSL-245GE uses the latest Wireless AC technology, which provides transfer rates of up to 1.2 Gbps¹ (866 AC + 300 N). The router operates on both the 2.4 GHz and 5 GHz wireless bands at the same time using concurrent dual-band technology and two external antennas. This allows you to browse the web, chat, and e-mail using the 2.4 GHz band, while simultaneously

Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router

streaming digital media, playing online games, or making Internet voice calls on the 5 GHz band.

Designed for Optimal Wireless Coverage

The DSL-245GE's antennas have been carefully designed to ensure that you will get little to no dead space in any environment. The high-powered amplifier sends the signal into the farthest corners of your home, while high-gain antennas extend the maximum range of wireless signals. Furthermore, the DSL-245GE's multiple external antennas improve wireless reception by bringing signals to where they are most needed to achieve the best possible performance.

File Sharing Right at Your Fingertips


The DSL-245GE lets you connect a USB storage device and instantly share documents, movies, pictures, and music. You can put your music library on a USB drive and share it with your entire home. You can show photos on the living room TV while a family member watches a movie on their computer. You can stream media files to multiple devices without interruption, or save them to your device for offline playback. The intuitive interface lets anyone immediately connect to a variety of entertainment options stored on your

own storage device.

Easy to Set Up

Setting up the DSL-245GE is easy with the D-Link easy setup wizard. Simply open the setup utility and follow a few easy steps to get your home network up and running. You can also set up a WPA2 encrypted network with the touch of a button using Wi-Fi Protected Setup (WPS). Simply press the respective WPS buttons on each device to instantly establish an encrypted connection to a new device. Your network will be encrypted with WPA/WPA2 wireless encryption and employ built-in dual active firewalls (SPI and NAT) to help protect your network from unauthorized access.

Back View

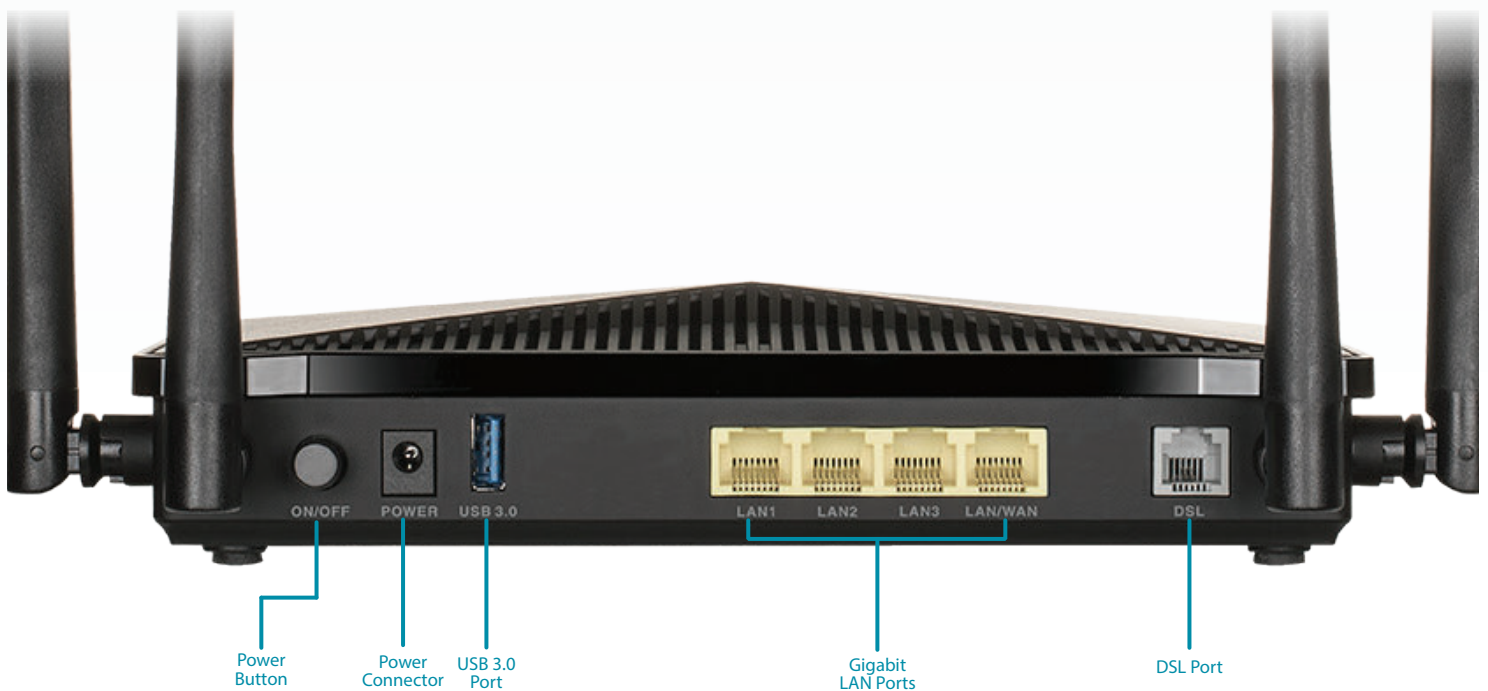

Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router

Technical Specifications

General

Device Interfaces	<ul style="list-style-type: none"> • One RJ-11 xDSL Port • Four 10/100/1000 Gigabit LAN Ports • 802.11 ac/n/g/b Wireless LAN¹ • Power Button 	<ul style="list-style-type: none"> • One USB 3.0 Port (Back) • Wireless Button (side) • WPS Button (side) • Reset Button (side)
Antenna Configuration	<ul style="list-style-type: none"> • 2 x 2.4 GHz Antennas 	<ul style="list-style-type: none"> • 2 x 5 GHz Antennas
Maximum Wi-Fi Speed	<ul style="list-style-type: none"> • 2.4 GHz • 300 Mbps¹ 	<ul style="list-style-type: none"> • 5 GHz • 866 Mbps¹
Standards	<ul style="list-style-type: none"> • IEEE 802.11ac • IEEE 802.11n • IEEE 802.11g • IEEE 802.11b • IEEE 802.3i 	<ul style="list-style-type: none"> • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3az Energy Efficient Ethernet • IEEE 802.3x Flow Control
Minimum System Requirements	<ul style="list-style-type: none"> • Windows 8/7/Vista/XP or Mac OS X 10.3 or higher • Microsoft Internet Explorer 9, Firefox 23, Chrome 28, Safari 7, or higher or other Java-enabled browser 	<ul style="list-style-type: none"> • Ethernet or Wireless Network Interface • Subscription with an Internet Service Provider (ISP)
ADSL Features	<ul style="list-style-type: none"> • T1.413i2, G.992.1 • G.dmt, G.992.2, G.lite • G.992.3 (G.bis/ADSL2) 	<ul style="list-style-type: none"> • G.992.5 (ADSL2+) • ITU G.994.1 (G.hs) • Annex L (Reach Extended ADSL2)
VDSL Features	<ul style="list-style-type: none"> • ITU-T G.993.2 VDSL2 • Supports 8a, 8b, 12a, 12b, 17a, 30a profiles • Supports G.vector • Supports ATM and PTM • Supports G.INP 	<ul style="list-style-type: none"> • Supports ATM forum UNI3.0, 3.1 and 4.0 permanent virtual circuits (PVCs) • Supports CBR, UBR, VBR-rt, VBR-nrt • Supports multiple PVCs • Supports ITU-T i.610F4/F5 OAM
Network Protocols	<ul style="list-style-type: none"> • RFC2684 multiprotocol Encapsulation over ATM Adaptation Layer 5 • RFC1483 multiprotocol Encapsulation over ATM Adaptation Layer 5 • RFC2364 PPP over ATM ALL5 (PPPoA) • RFC2516 PPP over Ethernet (PPPoE) • RFC1662 PPP in HDLC-like Framing • RFC1332 PPP Internet Protocol Control Protocol 	<ul style="list-style-type: none"> • RFC1577/2225 Classical IP and ARP over ATM (IPoA) • RFC894 A Standard for the Transmission of IP Datagrams over Ethernet Networks • RFC1042 A standard for the Transmission of IP Datagrams over IEEE 802 Networks • MER (a.k.a IP over Ethernet over AAL5) • Support ALG (Application Level Gateways)
Functionality		
Wireless Security Features	<ul style="list-style-type: none"> • WPA & WPA2 (Wi-Fi Protected Access) 	<ul style="list-style-type: none"> • Wi-Fi Protected Setup (WPS) - PIN/PBC
VPN Server	<ul style="list-style-type: none"> • GRE Tunneling: Up to 15 tunnels 	<ul style="list-style-type: none"> • IPSec Server: Up to 15 tunnels
Advanced Features	<ul style="list-style-type: none"> • Multi-language Web Setup Wizard • UPnP support • Multiple PVC (up to 8) 	<ul style="list-style-type: none"> • Dual Active Firewall • VPN pass-through/multi-session PPTP/L2TP/IPSec • 802.1p QoS (Quality of Service)
Routing Features	<ul style="list-style-type: none"> • RFC768 User Datagram Protocol (UDP) • RFC791 Internet Protocol (IP) • RFC792 Internet Control Message Protocol (ICMP) • RFC793 Transmission Control Protocol (TCP) • RFC826 An Ethernet Address Resolution Protocol (ARP) • RFC862 Echo Protocol • Support IP routing • Support transparent bridging 	<ul style="list-style-type: none"> • Support source and destination routing • Support DHCP server/client • Support UPnP • Support NAT,NAPT • Support DMZ • Support IP QoS • Support IGMP proxy • Support IPv6
Management Features	<ul style="list-style-type: none"> • Device Configuration, Management and Update • Web based GUI • Command Line Interface via telnet, or SSH • Universal Plug and Play (UPnP) Internet Gateway Device (IGDv1.0) 	<ul style="list-style-type: none"> • WAN Management Protocol (TR-069) • SNMP v1/v2 • PSI configuration file upload and download • Date/time update from SNTP Internet Time Server
Physical		

Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router

Dimensions	• 214 x 130 x 32 mm (8.43 x 5.12 x 1.26 inches)	
Weight	• 417 grams (0.92 pounds)	
Power	• Input: 100 ~ 240 V	• Output: 12 V / 1.5A
Temperature	• Operating: 0 to 45 °C (32 to 113 °F)	• Storage: -20 to 70 °C (-4 to 158 °F)
Humidity	• 10 % to 95 % non-condensing	
Certifications	• CE	• LVD
Order Information		
<i>Part Number</i>	<i>Description</i>	
DSL-245GE	Dual Band Wireless AC1200 VDSL2/ADSL2+ Modem Router	

¹ Maximum wireless signal rate derived from IEEE Standard 802.11ac, 802.11n, 802.11g, and 802.11b specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range. Wireless range and speed rates are D-Link relative performance measurements based on the wireless range and speed rates of a standard Wireless G product from D-Link. Maximum throughput based on D-Link 802.11ac devices.

Updated 2020/11/04