

## 4 Port Black SuperSpeed USB 3.0 Hub - 5Gbps

**Product ID:** ST4300USB3




The ST4300USB3 4-Port SuperSpeed USB 3.2 Gen 1 Hub allows you to add 4 additional USB 3.2 Gen 1 ports from a single USB 3.2 Gen 1 connection to the host computer system.

Backward compatible with USB 2.0 and USB 1.x standards, this USB 3.2 Gen 1 hub still supports older USB devices and can also be used as a hub on older systems that do not have USB 3.2 Gen 1 ports.

With the capability to mix and match USB 3.2 Gen 1/2.0/1.x devices and be used with or without the included external power adapter, this hub offers the best of versatility and portability.

Backed by a StarTech.com 2-year warranty and free lifetime technical support.

### Certifications, Reports and Compatibility

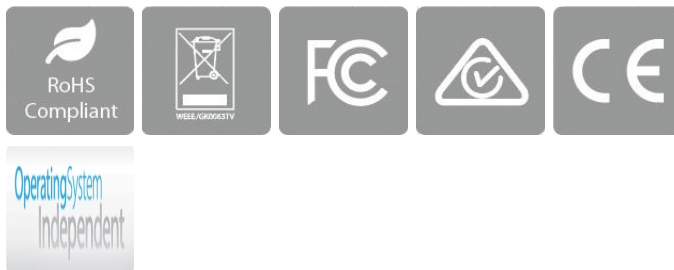

### Applications

- Expand your system USB 3.2 Gen 1 capabilities with additional ports
- Make hard to access USB ports more accessible, by being able to position the hub anywhere the cable will reach

- Extend the range of a USB device by having the hub act as a mid-point repeater

## Features

- Four USB type A ports that can each be accessed simultaneously
- SuperSpeed USB 3.2 Gen 1 compliant, with data transfer rates up to 5 Gbps
- Backward compatible with USB 2.0 and USB 1.0/1.1 specifications and devices
- Supports USB 3.2 Gen 1/2.0/1.x devices simultaneously, at full bandwidth
- Provides up to 900mA on any port up to a maximum of 2000mA total
- Compact, desktop-style form factor
- Plug-and-Play and hot-swap compatible

---

### Hardware

Warranty	2 Years
USB-C Device Port(s)	No
USB-C Host Connection	No
Fast-Charge Port(s)	No
Ports	4
Interface	USB 3.2 Gen 1 (5Gbps)
Chipset ID	VIA/VLI - VL811+

---

### Performance

Total USB Power Output	10W
Maximum Data Transfer Rate	5 Gbps (USB 3.2 Gen 1)
MTBF	24,000 Hours

---

### Connector(s)

External Ports	4 - USB Type-A (9 pin, 5 Gbps)
	1 - USB 3.2 Type-B (9 pin, Gen 1, 5Gbps)

---

### Software

OS Compatibility	OS Independent; No additional drivers or software required
------------------	--

---

**Special Notes / Requirements**

System and Cable Requirements	USB 3.0 or 2.0 or 1.x compliant host controller with available port.
-------------------------------	--

---

**Indicators**

LED Indicators	1 - Power (Blue)
----------------	------------------

---

**Power**

Power Source	AC Adapter Included
Input Voltage	100 - 240 AC
Input Current	0.35A
Output Voltage	5 DC
Output Current	2A
Center Tip Polarity	Positive
Plug Type	M
Power Consumption (In Watts)	10

---

**Environmental**

Operating Temperature	0C to 50C (32F to 122F)
Storage Temperature	-20C to 60C (-4F to 140F)
Humidity	5~85% RH

---

**Physical Characteristics**

Color	Black
Form Factor	Desktop
Material	Plastic
Product Length	3.7 in [9.5 cm]
Product Width	2.7 in [6.8 cm]
Product Height	0.9 in [2.3 cm]

Weight of Product 3.0 oz [84.0 g]

---

**Packaging Information**

Package Quantity 1

Package Length 8.4 in [21.4 cm]

Package Width 6.0 in [15.2 cm]

Package Height 3.2 in [8.2 cm]

Shipping (Package) Weight 14.5 oz [411.0 g]

---

**What's in the Box**

Included in Package

- 1 - USB 3.0 Hub
- 1 - 3 ft [0.91 m] USB 3.0 cable
- 1 - Power Adapter
- 1 - Instruction Manual

---

*\*Product appearance and specifications are subject to change without notice.*